



# PRODUCT FUNCTION

## CODE DETECTION FUNCTION

REAL-TIME COLLECTION OF IMSI IDENTIFICATION OF MOBILE COMMUNICATION TERMINALS WITHIN THE COVERAGE AREA.

## POSITIONING FUNCTION

YOU CAN LOCATE A SINGLE OR MULTIPLE TARGET MOBILE PHONES IN A SPECIFIED PUBLIC NETWORK AREA.

## COLLISION ANALYSIS

THE IMSI INFORMATION COLLECTED IN DIFFERENT TIME AND SPACE IS COMPARED AND ANALYZED TO THE IMSI NUMBER OF THE SUSPECT TARGET

## SWEEP FUNCTION

REAL-TIME ACQUISITION AND ANALYSIS OF THE CURRENT NETWORK ENVIRONMENT OF EACH OPERATOR.

## IMSI ATTRIBUTION IDENTIFICATION

REAL-TIME IDENTIFICATION AND COLLECTION OF IMSI LOCATION INFORMATION INCLUDES DOMESTIC PROVINCES (REGIONS), PREFECTURE-LEVEL CITIES, HONG KONG, MACAO AND TAIWAN, AND MORE THAN 200 MAJOR COUNTRIES (REGIONS) OVERSEAS.

## BLACK BOX FUNCTION

EFFECTIVELY MONITOR AND RECORD SENSITIVE OPERATIONS SUCH AS DEVICE POSITIONING, AND RECORD AND EXPORT DATA COLLECTED EACH TIME

# FUNCTIONAL CHARACTERISTICS

## INTELLIGENT DETECTION

FAST DISCOVERY, AUTOMATIC POSITIONING, ACCURATE RETURN VALUE, REAL-TIME VALUE (DIGITAL) AND HISTORICAL VALUE (WAVEFORM) DISPLAY AT THE SAME TIME.




## EASY TO CARRY

SMALL, LIGHT, EQUIPMENT HOST IS PLACED IN A PORTABLE BAG, EASY TO CARRY.



## EASY TO OPERATE

THE CONSOLE SOFTWARE AUTOMATICALLY SCANS THE WIRELESS ENVIRONMENT, OPENS THE SOFTWARE, SETS THE TARGET NUMBER, AND CLICKS THE "CODE DETECTION START" BUTTON TO START THE ONE-CLICK WORK

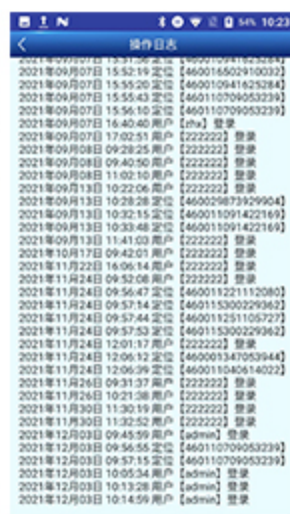

## TEST INTERFACE



## PRODUCT PARAMETER

OPERATING FREQUENCY BAND	BAND (1、 3、 34、 38、 39、 40)
SUPPORTED COMMUNICATION STANDARDS	TDD-LTE、 FDD-LTE
SUPPORT SIMULTANEOUS WORKING FREQUENCY COUNT	8
SUPPORTED CARRIERS	CAN BE CUSTOMIZED
DEVICE POWER CONSUMPTION	MACHINE 88W
TRANSMITTING POWER	20dB/Band
COVERING DISTANCE	10M~ 50M (DEPENDING ON THE OPERATOR'S NETWORK ENVIRONMENT AND BUILDING OCCLUSION)

POSITIONING ACCURACY	<1m
DIMENSION	DEVICE HOST (BATTERY BUILT-IN): 300*225*89MM
WEIGHT	3.5Kg
OPERATING VOLTAGE	DC19V
POWER SUPPLY MODE	LITHIUM BATTERY
BATTERY OPERATING TIME	2.5 HOURS (FULLY CHARGED)
OPERATING AMBIENT TEMPERATURE	-20°C~45°C
STORAGE TEMPERATURE	-45°C ~ +85°C

# PRODUCT DISPLAY









